




RIDGLASS®

The Original SBS High Profile Hip & Ridge Capping Shingle

Enhance the look & value of any shingled roof.



RIDGLASS HIP AND RIDGE SHINGLE

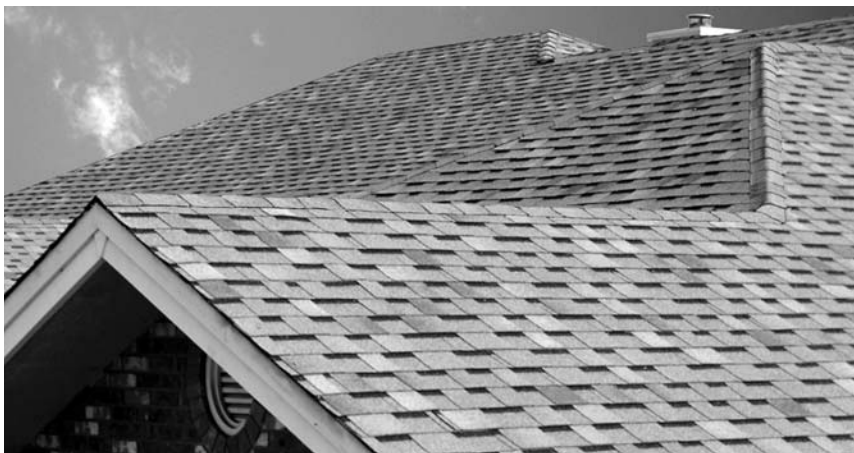

STANDARD HIP AND RIDGE SHINGLE

8" & 10" Ridglass SBS High Profile Hip & Ridge is the leading name in hip and ridge capping shingles. The patented Ridglass design will enhance the look and value of any shingled roof. Ridglass works beautifully with many popular ridge ventilation systems. For technical information contact 888.743.4527.

Plant Location:
3441 S. Willow Ave.
Fresno, CA 93725
559.499.2222

©2005 Elk Premium Building Products, Inc., an ElkCorp (NYSE:ELK) company. All rights reserved. All trademarks designated ® are registered trademarks and all trademarks designated ™ are other trademarks of Elk Premium Building Products, Inc., or its subsidiaries.

FEATURES:

- Manufactured with SBS modified asphalt for flexibility and superior granule adhesion.
- Fiberglass reinforced.
- Features WindGuard® sealant strips to prevent wind uplift.
- Industry leading color selection: for many popular shingle colors.
- Pre-formed and ready-to-apply right out of the box.
- Warranted for the life of the field shingle installed – up to 50 years*.

8" RIDGLASS:

- 48 pieces per box
- Coverage: 30 lin. ft. (9.1m)
- 20 boxes per pallet

10" RIDGLASS:

- 48 pieces per box
- Coverage: 30 lin. ft. (9.1m)
- 16 boxes per pallet

APPROVALS:


- Class A approved (UL R20633).
- Meets ASTM D3462
- Meets CSA 123.5
- ICCES ER-5695
- FBC 2335

* See limited warranty for complete details.




SBS High Profile Hip & Ridge Installation


1. NAILING: Nails must be corrosion resistant with heads a minimum of 3/8" in diameter. All fasteners must penetrate at least 3/4" into the wood deck or completely through plywood sheathing.

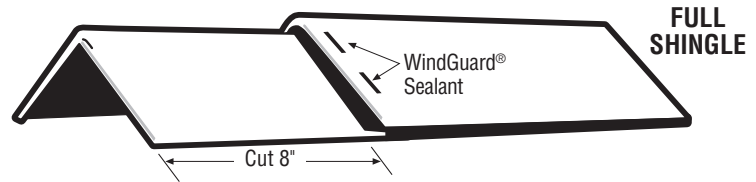


2. STARTER SHINGLE INSTALLATION: To create a starter shingle, cut off the 8" exposed portion of a full hip and ridge shingle leaving the dimensional fold portion, which will be approximately 8 1/4" inches long. Starting at the eaves for hips and opposite the prevailing wind for ridges, install starter shingle. Fasten through the dimensional fold with one nail on each side of starter shingle.

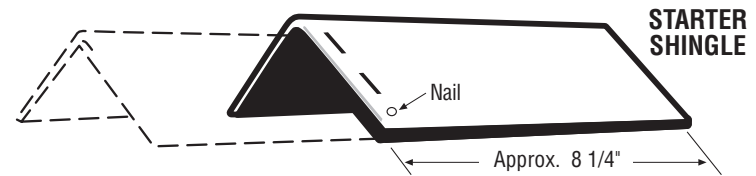

3. HIP AND RIDGE INSTALLATION: Beginning with a complete hip and ridge shingle, cover starter shingle with the 8" exposed portion overlapping the front end of the starter shingle by 1/4" and nail into place. One nail should be applied on each side of hip and ridge shingle 9" back from exposed end and 1" in from each side.

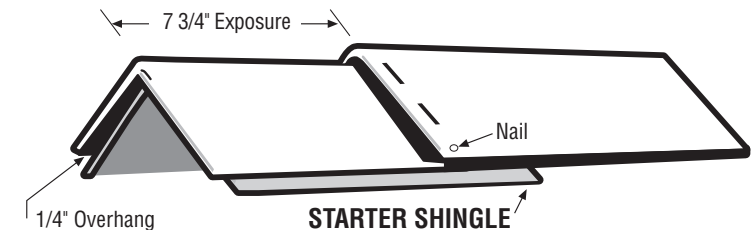

To proceed, overlap the first hip and ridge shingle extending 1/4" past dimensional fold with complete hip and ridge shingle, then nail shingle through dimensional fold. Continue installation in same fashion obtaining a 7 3/4" finished exposure.

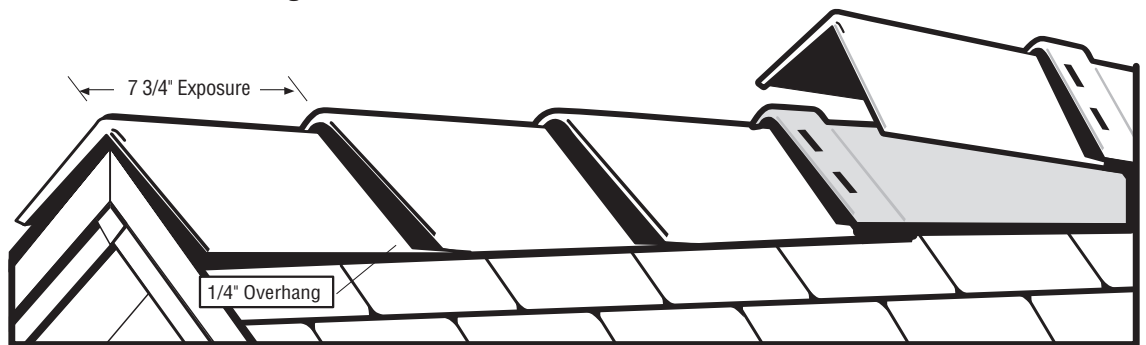

COLD WEATHER

When applying Ridglass in cold climate (under 50° F / 10° C), unpack carton on the roof and allow the shingles to warm before application. High wind application, contact Technical Services, 888.743.4527.

OPTIONAL: RAKE INSTALLATION:

